



**SUBMERSIBLE ELECTRICAL SLURRY PUMP**

**SPSL306S-4P**

**30 HP ( 22.4 Kw)**


6" (150 mm) Discharge

**TECHNICAL DETAILS**

Pump Type	: SLURRY
Connection Type	: DOL
Number of Poles	: 4
No. Of Stages	: 1
Motor Rating (Kw/HP)	: 22.4/30
Voltage (V)	: 415
Phase	: 3
Maximum Current (A)	: 45
Rated Speed (rpm)	: 1450
Frequency (Hz)	: 50
Motor Insulation Class	: H
Max. Start/Stop per hour	: 15
Max. Temp. of pumped Fluid	: 40 °C
Motor Type	: WATER COOLED
Total Head (m)	: 30.5
Discharge (LPM)	: 5700
Delivery Size (mm)	: 150
Solid handling (mm)	: 60
Pump Weight (Kg)	: 410



**PERFORMANCE CURVES**

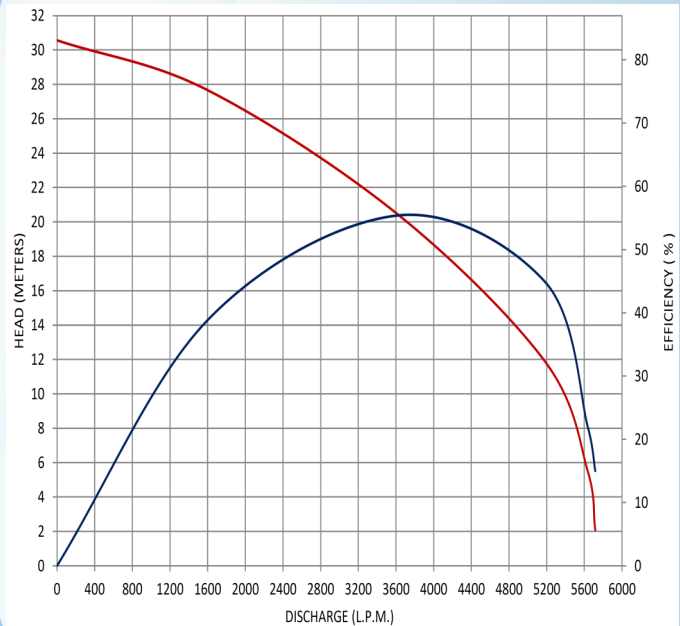



**SUBMERSIBLE ELECTRICAL SLURRY PUMP**

**SPSL306S-4P**  
**30 HP ( 22.4 Kw)**  
6" (150 mm) Discharge

**APPLICATIONS**

- ⇒ General slurry duties
- ⇒ Harbour construction
- ⇒ Ash transfer
- ⇒ Mine waste pumping
- ⇒ Slit removal
- ⇒ Coal runoff sumps
- ⇒ Sand and gravel pumping
- ⇒ Food waste pumping
- ⇒ Barge and tank clean out
- ⇒ Lime slurry

**CONSTRUCTION**

- ◇ Dual class winding - IP 68
- ◇ Heavy duty bearings
- ◇ HO7RNF Cable 4 Core x 16 Sq. mm x 10 m (Length)
- ◇ High Chrome (27 %) - Impeller, Agitator & Wear Plate
- ◇ Ductile iron Volute hardened to 17 to 22 HRC
- ◇ SC/SC Mechanical Seal
- ◇ SS 304 Fasteners
- ◇ NBR/ Viton - all 'O' Rings and Gasket.

**FEATURES**

- \* Solid to Slurry
- \* High Chrome alloy steel Impeller / Agitator / Wear Plate
- \* Prevents Clogging
- \* Max. pump submergence up to 15 meter.

**PUMP SIZE:**

- \* Pump Height (mm) : 1325
- \* Pump Diameter (mm) : 578



Agitator

Each pump is fitted with a high Chrome alloy steel Agitator to assist with the reduction of solid to slurry and which prevents clogging of the inlet of pump.



**SUBMERSIBLE ELECTRICAL SLURRY PUMP**

**SPSL306S-4P - SECTIONAL DRAWING**

